




Aeon Labs Siren Gen5

(Z-Wave Siren Gen5)

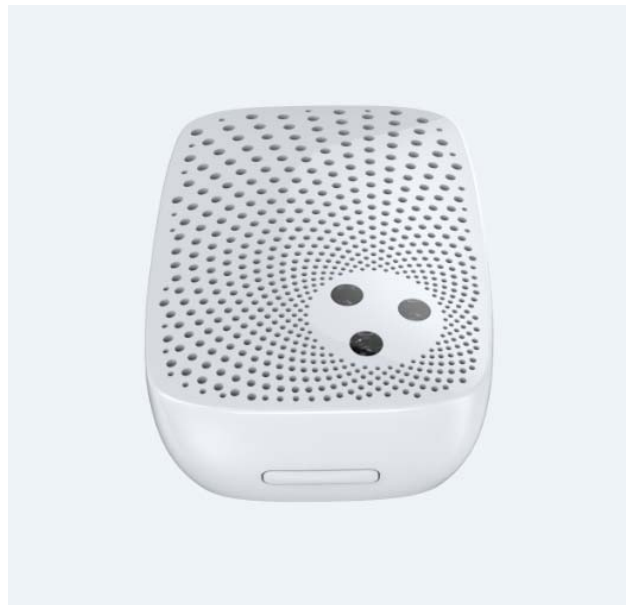

Change history

Revision	Date	Change Description
1	05/14/2014	Initial draft.
2	07/28/2014	Use Configuration CC to select the siren sound.

Aeon Labs Siren Gen5
Engineering Specifications and Advanced Functions for Developers
(V3.24)

Aeon Labs Siren is a switch multilevel device based on Z-wave enhanced 232 slave library of V6.51.01.

1. Library and Command Classes

1.1 SDK: 6.51.01

1.2 Library

- Basic Device Class: BASIC_TYPE_ROUTING_SLAVE
- Generic Device class: GENERIC_TYPE_SWITCH_BINARY
- Specific Device Class: SPECIFIC_TYPE_SIREN

1.3 Commands Class

	Included Non-Secure	Included Secure
Node Info Frame	COMMAND_CLASS_ZWAVEPLUS_INFO V2 COMMAND_CLASS_SWITCH_BINARY V1 COMMAND_CLASS_SWITCH_MULTILEVEL V1 COMMAND_CLASS_CONFIGURATION V1 COMMAND_CLASS_ASSOCIATION V2 COMMAND_CLASS_ASSOCIATION_GRP_INFO V1 COMMAND_CLASS_MANUFACTURER_SPECIFIC V2 COMMAND_CLASS_POWERLEVEL V1 COMMAND_CLASS_SCENE_ACTIVATION V1 COMMAND_CLASS_SCENE_ACTUATOR_CONF V1 COMMAND_CLASS_VERSION V2 COMMAND_CLASS_FIRMWARE_UPDATE_MD V2 COMMAND_CLASS_SECURITY V1 COMMAND_CLASS_MARK V1 COMMAND_CLASS_DEVICE_RESET_LOCALLY V1 COMMAND_CLASS_HAIL V1	COMMAND_CLASS_ZWAVEPLUS_INFO V2 COMMAND_CLASS_VERSION V2 COMMAND_CLASS_MANUFACTURER_SPECIFIC V2 COMMAND_CLASS_SECURITY V1 COMMAND_CLASS_MARK V1 COMMAND_CLASS_DEVICE_RESET_LOCALLY V1 COMMAND_CLASS_HAIL V1
Security Command Supported Report Frame	–	COMMAND_CLASS_SWITCH_BINARY V1 COMMAND_CLASS_SWITCH_MULTILEVEL V1 COMMAND_CLASS_CONFIGURATION V1 COMMAND_CLASS_ASSOCIATION V2 COMMAND_CLASS_ASSOCIATION_GRP_INFO V1 COMMAND_CLASS_MANUFACTURER_SPECIFIC V2 COMMAND_CLASS_SCENE_ACTIVATION V1 COMMAND_CLASS_SCENE_ACTUATOR_CONF V1 COMMAND_CLASS_VERSION V1 COMMAND_CLASS_POWERLEVEL V1 COMMAND_CLASS_FIRMWARE_UPDATE_MD V2 COMMAND_CLASS_DEVICE_RESET_LOCALLY V1 COMMAND_CLASS_HAIL V1


2. Technical Specifications

Operating Distance: Up to 550 feet (170 meters) outdoors.

3. Familiarize Yourself with Your Siren Gen5

3.1 Interface

- Action Button
- 105db Speaker System
- Safety LED
- Network LED

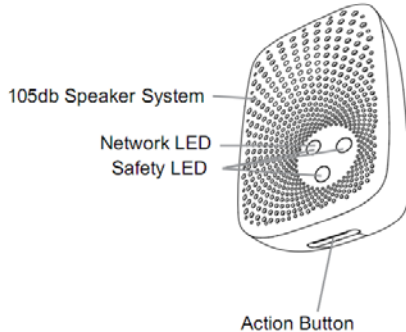

4. All functions of each trigger

4.1 Functions of Action Button

Trigger	Description
Clicked	<p>Cancel Alarm Status, Let Siren into Learn Mode.</p> <p>Add Siren into Z-Wave Network:</p> <ol style="list-style-type: none"> 1. Install Siren, and plug it into the socket of AC Power. 2. Let the primary controller into inclusion mode (If you don't know how to do this, please refer to its manual). 3. Press the Action Button. 4. If the Learning is failed, please repeat the process from step 2. <p>Remove Siren from Z-Wave Network:</p> <ol style="list-style-type: none"> 1. Install Siren, and plug it into the socket of AC Power. 2. Let the primary controller into exclusion mode (If you don't know how to do this, refer to its manual). 3. Press the Action Button. 4. If the remove is failed, please repeat the process from step 2. <p>Note: If Siren is removed from Z-wave network, it will be reset to factory default.</p>
Press and hold 5~8 seconds	<p>Cancel Alarm Status, Test the Sound:</p> <p>For 1 to 5 seconds: The Network LED will fast blink, after 5 seconds, the alarm sound will ring for 3 seconds and the same time all LEDs go into the state of fast blink.</p>
Press and hold 20 seconds and released	<p>Reset Siren to Factory Default:</p> <ol style="list-style-type: none"> 1. Make sure the Siren is connected to the power supply. 2. If holding time more than one second, the Network LED will fast blink. If holding time more than 20seconds, Network LED will be on for 2 seconds, which indicates the reset operation is successful, otherwise please repeat from step1 to step2. <p>Note: Reset Siren to factory default settings will:</p> <ol style="list-style-type: none"> a), remove Siren from Z-Wave network state; b), delete the Association setting; c), restore the configuration settings to the default.

4.2 Functions of wireless controller.

Trigger	Description
Command	Trigger alarm, Sound is playing, and LEDs blink fast.

5. Special rule of each command

5.1 Z-Wave Plus Info Report Command Class

Parameter	Value
Z-Wave Plus Version	1
Role Type	5 (ZWAVEPLUS_INFO_REPORT_ROLE_TYPE_SLAVE_ALWAYS_ON)
Node Type	0 (ZWAVEPLUS_INFO_REPORT_NODE_TYPE_ZWAVEPLUS_NODE)
Installer Icon Type	0x0F00 (ICON_TYPE_GENERIC_SIREN)
User Icon Type	0x0F00 (ICON_TYPE_GENERIC_SIREN)

5.1 Association Command Class

The Siren supports 1 Association groups.

The Node IDs in Group 1 will receive Hail Command /Basic report (configurable) which is sent via single-cast (if there are more than 1 Node ID) when Siren's status changed.

5.3 The rules of the level value (Basic CC, Binary Switch CC, Scene CC)

- (1) 0x00: Close the siren sound.
- (2) 0x01 ~ 0x63 and 0xff: Open the current siren sound.
- (3) Other values will be ignored.

5.4 Scene Actuator Conf Command Class

The Siren supports max 255 Scene ID.

The Scene Actuator Conf Set command is effective, when only Level \geq 0 and Level $<$ 0x64 or Level=0xff, otherwise, it will be ignored.

The Scene Actuator Configuration Get Command is used to request the settings for a given scene, if scene ID is not setting, it will be ignored. If Scene ID =0, then the Siren will report currently the activated scene settings. If the currently activated scene settings do not exist, the Siren will reports Level = currently load status and Dimming Duration=0

5.5 Scene Activation Set Command Class

The Scene Activation Set Command is effective, when only Level \geq 0 and Level $<$ 0x64 or Level=0xff, otherwise, it will be ignored. If the requested Scene ID is not configured, it will be ignored too.

5.6 Configuration Set Command Class

7	6	5	4	3	2	1	0
Command Class = COMMAND_CLASS_CONFIGURATION							

Command = CONFIGURATION_SET		
Parameter Number		
Default	Reserved	Size
Configuration Value 1(MSB)		
Configuration Value 2		
.....		
Configuration Value n(LSB)		

Parameter Number Definitions (8 bit):

Parameter Number Hex / Decimal	Description	Default Value	Size
0x25 (37)	<p>1, The value1 (byte) is used to select the Siren sound :</p> <p>Value1=0, do not change the current Siren sound. Value1=1, Siren sound 1 is selected. Value1=2, Siren sound 2 is selected. Value1=3, Siren sound 3 is selected. Value1=4, Siren sound 4 is selected. Value1=5, Siren sound 5 is selected. Other values will be ignored.</p> <p>2, The value2 (byte) is used to adjust the volume: Value2=0, do not change the current volume. Value2=1, set the volume to 88 dB. Value2=2, set the volume to 100 dB. Value2=3, set the volume to 105 dB. Other values will be ignored.</p>	Value1 = 1. Value2 = 3.	2
0x50 (80)	Enable to send notifications to associated devices (Group 1) when the state of Siren changed (0=nothing, 1=hail CC, 2=basic CC report).	0	1
0xC8 (200)	Partner ID (0= Aeon Labs Standard Product).	0	1
0xFC (252)	Enable/disable Lock Configuration (0 =disable, 1 = enable).	0	1
0xFF (255)	1, Value=0x55555555、 Default=1、 Size=4 Reset to factory default setting and removed from the z-wave network	N/A	4
	2, Value=0、 Default=1、 Size=1 Reset to factory default setting	N/A	1